
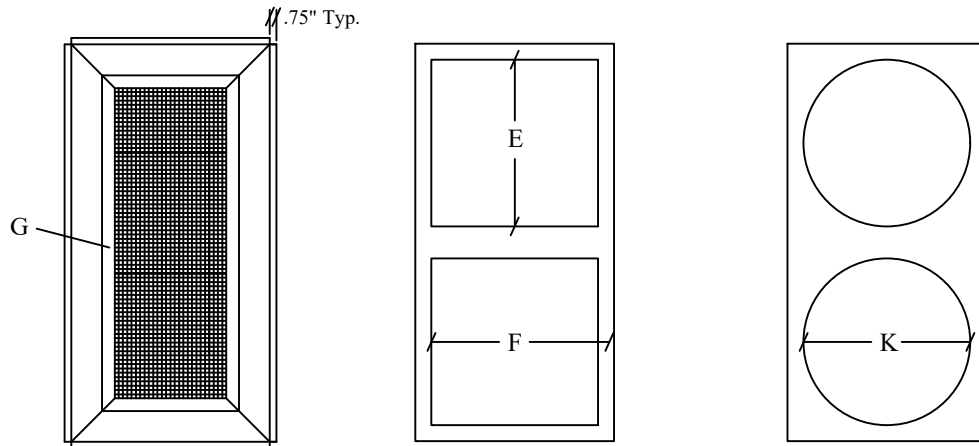
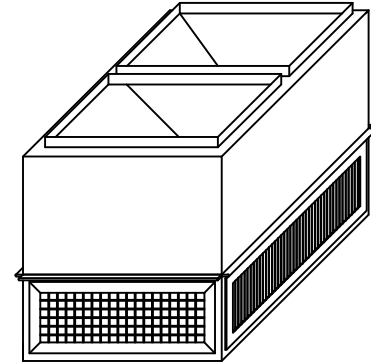


OFFSET FOUR - WAY THROW

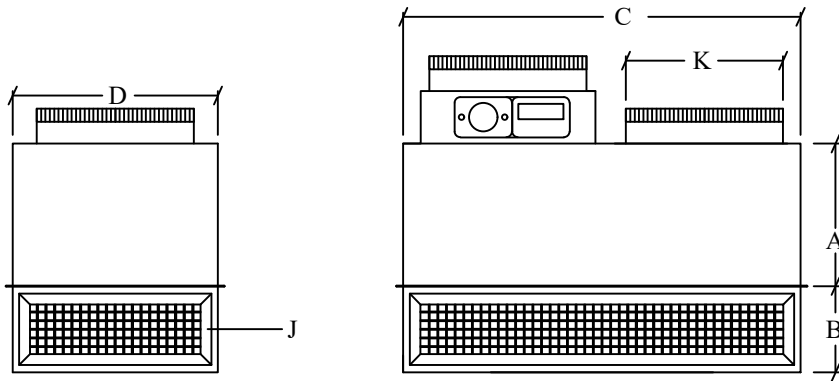

TYPICAL HARD DUCT CONNECTION OR TYPICAL FLEX DUCT CONNECTION

- STANDARD ITEMS:**
- 1: 2" THICK R-8 INTERNAL INSULATION
 - 2: HANGING BRACKETS
 - 3: WHITE ALUMINUM GRILLES
 - 4: GALVANIZED STEEL CONSTRUCTION
- OPTIONS:**
- 1: RECTANGLE HARD DUCT CONNECTION
 - 2: ROUND FLEX DUCT COLLARS (4.5" TALL)
 - 3: MILL FINISH GRILLES
 - 4: SUPPLY/RETURN DUCT SMOKE DETECTOR
 - 5: CLOSED CELL INSULATION
 - 6: STAINLESS STEEL CONSTRUCTION
 - 7: CUSTOM DUCT INLET SIZE:
 - 8: PAINTED BOTTOM (WHITE)

MODEL#	A	B	C	D	E	F	G	H	J	CFM RANGE	NC	MIN THROW#	MAX THROW#
RA4824	12.0"	7.0"	46.0"	22.0"	18.0"	18.0"	38"X14"	14"X 4"	36"X 4"	1,500 - 2,500	23 - 37	21 - 30 - 42	31 - 39 - 55
RA4836	15.0"	8.0"	46.0"	34.0"	18.0"	30.0"	38"X26"	26"X 5"	36"X 5"	2,300 - 3,750	23 - 37	41 - 34 - 47	35 - 43 - 61

#THROW DISTANCE IN FEET FOR TERMINAL VELOCITY OF 150-100-50 FPM
*GRILLE SIZE

EP Custom Products, Inc.- 7823 Commerce Drive, PO Box 1118, Denver, North Carolina, 28037 704.483.8745

www.epcustomproducts.com

 EP CUSTOM PRODUCTS <small>ENDLESS POSSIBILITIES</small>	RIGHT ANGLE CONCENTRIC DIFFUSER MODELS RA4824-4836 4-WAY THROW
	SUBMITTED TO:
DATE: 07-07-21	Items subject to change without notice. EP Custom Products is not responsible to notify of changes or updates in product design. Copyright 2021.
REVISION #: 3	