



THREE - WAY THROW



TOP VIEW



ISO VIEW

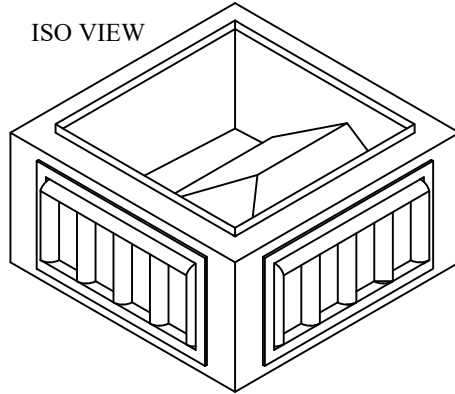

SIDE VIEW

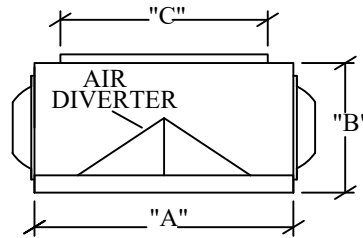

- STANDARD ITEMS:
- 1: 2" THICK R-8 INTERNAL INSULATION
 - 2: 3/8" RIVET NUTS IN CORNERS
 - 3: GALVANIZED STEEL CONSTRUCTION (DROP BOX)
 - 4: ALUMINUM DRUM LOUVERS (WHITE)

- OPTIONS:
- 1: TDC TYPE DUCT CONNECTION
 - 2: OPPOSED BLADE DAMPERS
 - 3: CLOSED CELL INSULATION
 - 4: DELETE INSULATION
 - 5: DRUM LOUVERS (MILL FINISH)
 - 6: STAINLESS STEEL CONSTRUCTION
 - 7: CUSTOM DUCT INLET SIZE _____

NOTES:


- 1: THROW BASED ON 150-100-50 FPM NECK VELOCITY
- 2: DATA BASED AT ZERO DEGREES DEFLECTION

MODEL#	"A"	"B"	"C"	LOUVER SIZE	CFM RANGE	NC	THROW MIN#	THROW MAX#
3WAY-0.5	26.0"	11.5"	20.0"	18 X 6	1,000 - 2,500	21 - 42	26-40-48	38-56-67
3WAY-1	32.0"	11.5"	26.0"	24 X 6	1,600 - 3,300	20 - 41	32-47-56	44-64-76
3WAY-2	35.0"	15.0"	27.0"	25 X 10	3,000 - 5,700	23 - 44	30-53-70	55-81-96
3WAY-3	40.0"	15.0"	32.0"	30 X 10	3,750 - 6,750	23 - 44	45-65-77	60-88-105
3WAY-3.5	40.0"	17.0"	32.0"	30 X 12	4,500 - 8,250	24 - 46	48-71-84	65-97-116
3WAY-4	42.0"	20.0"	32.0"	30 X 15	5,625 - 10,000	25 - 48	53-76-90	73-105-124
3WAY-4.5	47.0"	20.0"	37.0"	35 X 15	6,500 - 12,000	26 - 47	59-80-101	81-110-139
3WAY-5	52.0"	20.0"	42.0"	40 X 15	8,700 - 13,700	25 - 41	70-95-120	84-122-145
3WAY-6	62.0"	20.0"	52.0"	50 X 15	9,500 - 17,000	27 - 49	71-104-123	97-142-167

#THROW IN FEET

DEFLECTION	NC	THROWS	PT
15 DEGREES	+ 4	X .85	X 1.2
30 DEGREES	+ 8	X .69	X 1.8

www.epcustomproducts.com

 <p>EP CUSTOM PRODUCTS ENDLESS POSSIBILITIES</p>	<p>DRUM LOUVER DROP BOX MODELS 3WAY-1 THRU 3WAY-6 THREE-WAY THROW</p>
	<p>SUBMITTED TO:</p>
<p>DATE: 06-21-21</p>	<p>Items subject to change without notice. EP Custom Products is not responsible to notify of changes or updates in product design. Copyright 2021.</p>
<p>REVISION #: 5</p>	