


FOUR - WAY THROW HIGH CAPACITY

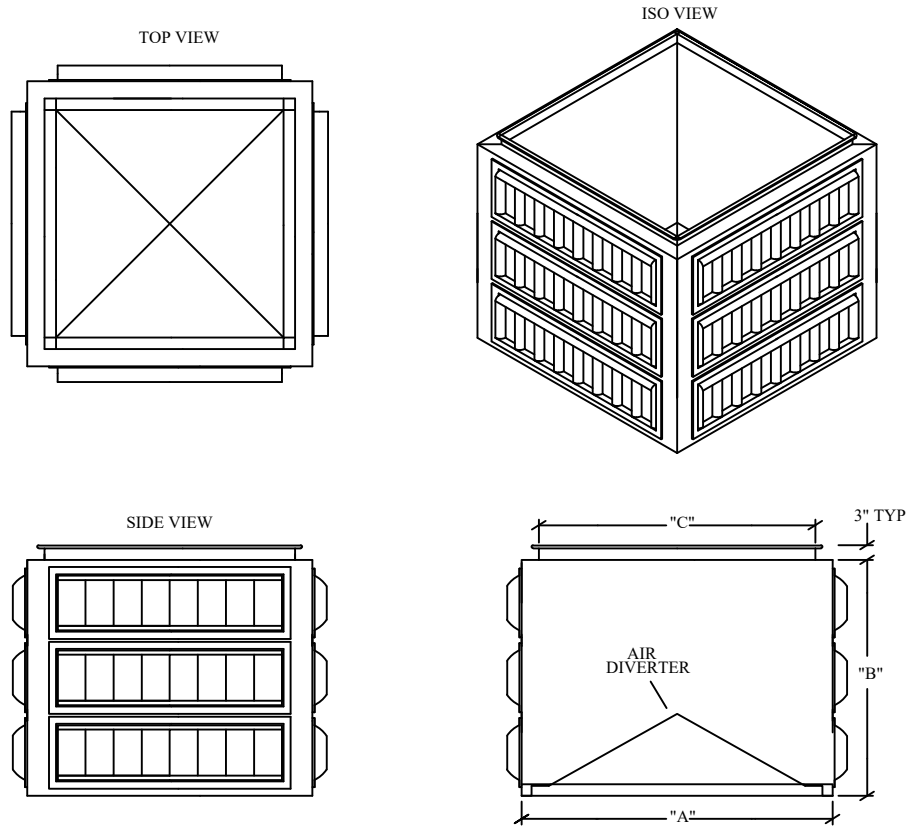

- STANDARD ITEMS:**
- 1: 2" THICK R-8 INTERNAL INSULATION
 - 2: GALVANIZED STEEL CONSTRUCTION (DROP BOX)
 - 3: ALUMINUM DRUM LOUVERS (WHITE)
 - 4: TDC TYPE DUCT CONNECTION

- OPTIONS:**
- 1: OPPOSED BLADE DAMPERS
 - 2: CLOSED CELL INSULATION
 - 3: DELETE INSULATION
 - 4: DRUM LOUVERS (MILL FINISH)
 - 5: STAINLESS STEEL CONSTRUCTION
 - 6: CUSTOM DUCT INLET SIZE _____

NOTES:

- 1: THROW BASED ON 150-100-50 FPM NECK VELOCITY
- 2: DATA BASED AT ZERO DEGREES DEFLECTION
- 3: TYPICAL DUCT FLANGE HEIGHT OF 3"
- 4: 4WAY-12 USES TWO DRUM LOUVERS PER ROW


DEFLECTION	NC	THROWS	PT
15 DEGREES	+ 4	X .85	X 1.2
30 DEGREES	+ 8	X .69	X 1.8

MODEL#	"A"	"B"	"C"	LOUVER SIZE	CFM RANGE	NC	THROW MIN#	THROW MAX#
4WAY-11	86.0"	57.00"	72.0"	70 X 15	60,000 - 87,500	34 - 47	90-123-156	108-147-186
4WAY-12	102.0"	60.00"	80.0"	40 X 15	80,000 - 110,000	30 - 45	72-96-128	96-124-152
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-

#THROW IN FEET

EP Custom Products, Inc.- 7823 Commerce Drive, PO Box 1118, Denver, North Carolina, 28037 704.483.8745

www.epcustomproducts.com

 EP CUSTOM PRODUCTS <small>ENDLESS POSSIBILITIES</small>	DRUM LOUVER DROP BOX MODELS 4WAY-11 THRU 4WAY-12 FOUR-WAY THROW
	SUBMITTED TO:
DATE: 07-07-21 REVISION #: 1	Items subject to change without notice. EP Custom Products is not responsible to notify of changes or updates in product design. Copyright 2021.