



SIX - WAY THROW



TOP VIEW

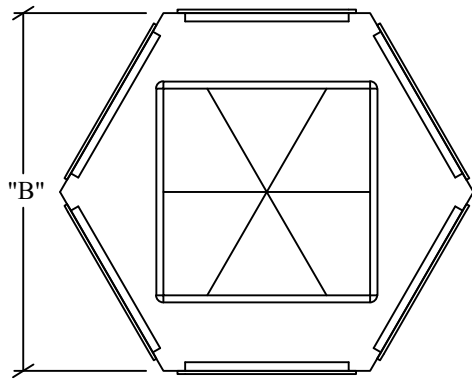

ISO VIEW

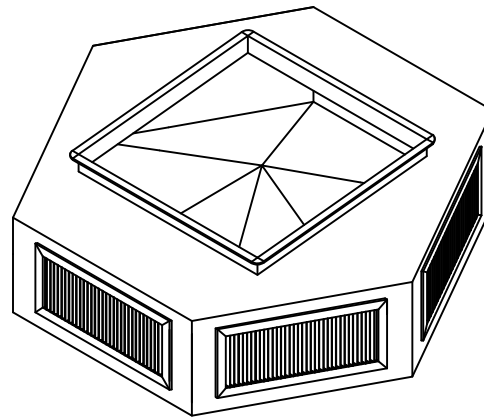

SIDE VIEW

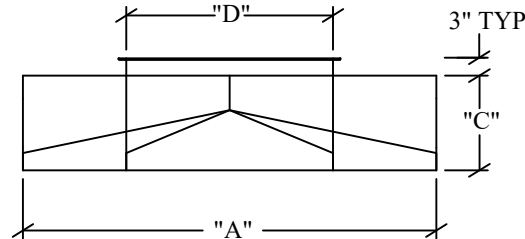

- STANDARD ITEMS:
- 1: 2" THICK R-8 INTERNAL INSULATION
 - 2: 3/8" RIVET NUTS IN CORNERS
 - 3: GALVANIZED STEEL CONSTRUCTION (DROP BOX)
 - 4: ALUMINUM DOUBLE DEFLECTION GRILLES (WHITE)
 - 5: TDC TYPE DUCT CONNECTION

- OPTIONS:
- 1: PAINT DROP BOX (WHITE)
 - 2: OPPOSED BLADE DAMPERS
 - 3: CLOSED CELL INSULATION
 - 4: DELETE INSULATION
 - 5: DOUBLE DEFLECTION GRILLES (MILL FINISH)
 - 6: STAINLESS STEEL CONSTRUCTION
 - 7: CUSTOM DUCT INLET SIZE _____


NOTES:

- 1: THROW BASED ON 150-100-50 FPM NECK VELOCITY
- 2: DATA BASED AT ZERO DEGREES DEFLECTION

MODEL#	"A"	"B"	"C"	"D"	GRILLE SIZE	CFM RANGE	NC	THROW MIN#	THROW MAX#
R6WAY-1	41.25"	35.72"	11.0"	20.0"	14 X 6	1,700 - 3,450	19 - 40	16-22-31	25-31-44
R6WAY-2	53.25"	46.12"	11.0"	24.0"	20 X 6	2,600 - 5,200	21 - 42	19-27-38	31-38-54
R6WAY-3	57.25"	49.58"	15.0"	28.0"	20 X 10	4,400 - 8,800	23 - 44	25-35-50	41-50-70
R6WAY-4	67.25"	58.25"	15.0"	33.0"	26 X 10	5,800 - 11,650	24 - 45	29-41-57	46-57-80
R6WAY-5	77.25"	66.90"	17.0"	38.0"	30 X 12	7,500 - 15,000	23 - 44	32-46-65	53-66-92
R6WAY-6	77.25"	66.90"	21.0"	38.0"	30 X 16	10,250 - 20,500	25 - 45	37-53-76	62-76-108
R6WAY-7	87.25"	75.56"	23.0"	40.0"	36 X 18	12,650 - 25,300	23 - 44	39-59-84	69-84-119

#THROW IN FEET

www.epcustomproducts.com

 EP CUSTOM PRODUCTS <small>ENDLESS POSSIBILITIES</small>	DOUBLE DEFLECTION DROP BOX MODELS R6WAY-1 THRU R6WAY-7 SIX-WAY THROW
	SUBMITTED TO:
DATE: 09-22-21 REVISION #: 4	Items subject to change without notice. EP Custom Products is not responsible to notify of changes or updates in product design. Copyright 2021.