



FOUR - WAY THROW



TOP VIEW



ISO VIEW

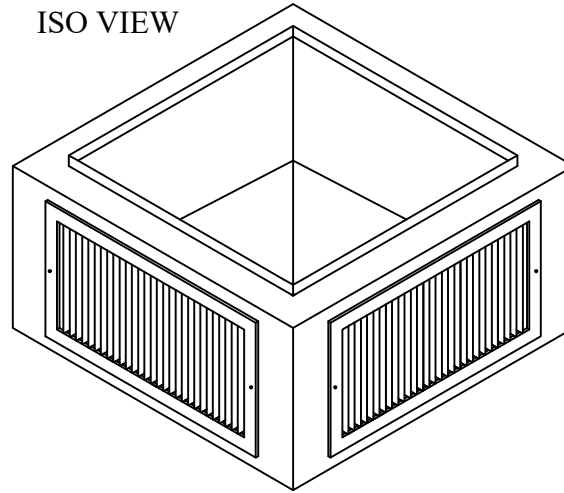

SIDE VIEW

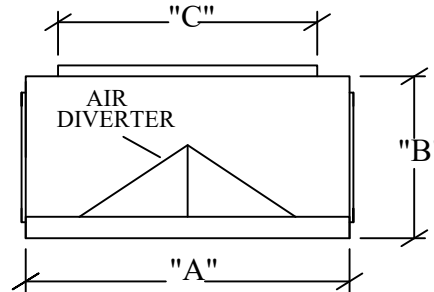

STANDARD ITEMS:

- 1: 2" THICK R-8 INTERNAL INSULATION
- 2: 3/8" RIVET NUTS IN CORNERS
- 3: GALVANIZED STEEL CONSTRUCTION (DROP BOX)
- 4: ALUMINUM DOUBLE DEFLECTION GRILLES (WHITE)

OPTIONS:

- 1: PAINT DROP BOX (WHITE)
- 2: OPPOSED BLADE DAMPERS
- 3: CLOSED CELL INSULATION
- 4: DELETE INSULATION
- 5: DOUBLE DEFLECTION GRILLES (MILL FINISH)
- 6: STAINLESS STEEL CONSTRUCTION
- 7: CUSTOM DUCT INLET SIZE _____
- 8: TDC TYPE DUCT CONNECTION

NOTES:

- 1: THROW BASED ON 150-100-50 FPM NECK VELOCITY
- 2: DATA BASED AT ZERO DEGREES DEFLECTION

MODEL#	"A"	"B"	"C"	GRILLE SIZE	CFM RANGE	NC	THROW MIN#	THROW MAX#
R4WAY-1	26.0"	9.5"	20.0"	18 X 5	1,000 - 2,500	15 - 41	14-21-32	27-33-46
R4WAY-2	30.0"	10.5"	24.0"	22 X 6	1,550 - 3,500	16 - 42	17-25-36	32-40-56
R4WAY-3	34.0"	11.5"	28.0"	26 X 7	2,650 - 5,300	23 - 44	24-33-47	39-47-67
R4WAY-4	38.0"	12.5"	32.0"	30 X 8	3,600 - 7,000	24 - 45	28-39-55	46-55-78
R4WAY-5	38.0"	16.5"	32.0"	30 X 12	5,000 - 10,000	23 - 44	32-46-65	53-66-92
R4WAY-6	44.0"	16.5"	38.0"	36 X 12	6,000 - 11,000	24 - 42	34-55-72	56-68-96
R4WAY-7	44.0"	20.5"	38.0"	36 X 16	8,250 - 15,000	25 - 43	41-59-84	65-80-113

#THROW DISTANCE IN FEET

www.epcustomproducts.com



EP CUSTOM PRODUCTS
ENDLESS POSSIBILITIES

DATE: 09-22-21
REVISION #:

DOUBLE DEFLECTION DROP BOX
MODELS R4WAY-1 THRU R4WAY-7
FOUR-WAY THROW

SUBMITTED TO:

Items subject to change without notice. EP Custom Products is not responsible to notify of changes or updates in product design. Copyright 2021.