


# EIGHT - WAY THROW



TOP VIEW

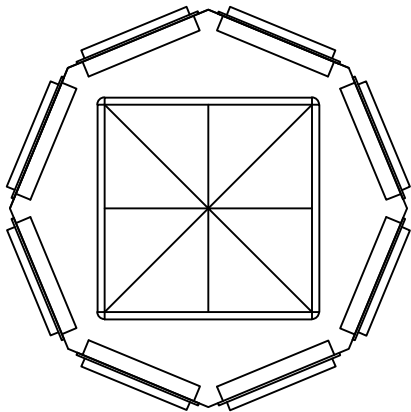

- STANDARD ITEMS:
- 1: 2" THICK R-8 INTERNAL INSULATION
  - 2: 3/8" RIVET NUTS IN CORNERS
  - 3: GALVANIZED STEEL CONSTRUCTION ( DROP BOX )
  - 4: ALUMINUM DRUM LOUVERS ( WHITE )
  - 5: TDC TYPE DUCT CONNECTION

- OPTIONS:
- 1: OPPOSED BLADE DAMPERS
  - 2: CLOSED CELL INSULATION
  - 3: DELETE INSULATION
  - 4: DRUM LOUVERS ( MILL FINISH )
  - 5: STAINLESS STEEL CONSTRUCTION
  - 6: CUSTOM DUCT INLET SIZE \_\_\_\_\_

SIDE VIEW

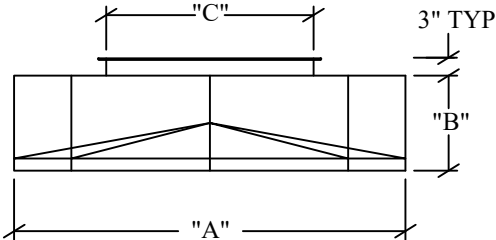

NOTES:


- 1: THROW BASED ON 150-100-50 FPM NECK VELOCITY
- 2: DATA BASED AT ZERO DEGREES DEFLECTION

MODEL#	"A"	"B"	"C"	GRILLE SIZE	CFM RANGE	NC	THROW MIN#	THROW MAX#
8WAY-1	43.50"	11.0"	20.0"	12 X 6	2,000 - 4,400	13 - 42	15-27-36	30-44-53
8WAY-2	58.00"	11.0"	28.0"	18 X 6	3,600 - 6,600	21 - 42	20-40-48	38-56-67
8WAY-3	63.00"	15.0"	28.0"	20 X 10	6,800 - 12,000	22 - 43	39-55-65	50-74-88
8WAY-4	75.00"	15.0"	30.0"	25 X 10	8,000 - 15,200	23 - 44	42-61-71	55-81-96
8WAY-5	75.00"	20.0"	38.0"	25 X 15	12,500 - 20,800	24 - 43	50-74-85	64-94-110
8WAY-6	87.00"	20.0"	38.0"	30 X 15	15,000 - 25,000	25 - 43	53-78-90	68-100-117

#THROW IN FEET

DEFLECTION	NC	THROWS	PT
15 DEGREES	+ 4	X .85	X 1.2
30 DEGREES	+ 8	X .69	X 1.8

www.epcustomproducts.com

 <p><b>EP CUSTOM PRODUCTS</b> ENDLESS POSSIBILITIES</p>	<p>DRUM LOUVER DROP BOX MODELS 8WAY-1 THRU 8WAY-6 EIGHT-WAY THROW</p>
	<p>SUBMITTED TO:</p>
<p>DATE: 09-22-21 REVISION #: 1</p>	<p>Items subject to change without notice. EP Custom Products is not responsible to notify of changes or updates in product design. Copyright 2021.</p>